



Compliance with relevant ASTM and ISO Standards as well as Industry Engineering specifications

Labino AB LED UV Lights	Built in White Light LED	UV Intensity at 38 cm (15") (µW/cm <sup>2</sup> )	COMPLIES WITH ASTM E3022-2018 Standard	COMPLIES WITH Rolls-Royce RRES90061 Specification	COMPLIES WITH Airbus AITM6-1001 Testing Method	COMPLIES WITH Pratt & Whitney Requirements	COMPLIES WITH The Boeing Co Requirements	COMPLIES WITH ISO 3059-12 Standard	COMPLIES WITH USAF Requirements
<b>GX SERIES – OVERHEAD LIGHT</b>									
<b>GX Orion REMOTE</b>	✓	1 500-7 000	✓	-	-	-	-	✓	-
<b>GX Orion UV &amp; WH</b>	✓	≈ 7 000	✓	✓	✓	✓	-	✓	-
<b>GX Orion UV</b>	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
<b>BB 2.0 SERIES – HANDHELD LIGHT</b>									
<b>BB 2.0 Helios</b>	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
<b>BB 2.0 Ikaros</b>	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
<b>BB 2.0 Artemis</b>	-	≈ 22 000	✓	-	-	-	-	✓	-
<b>MB 3.0 SERIES – HANDHELD LIGHT</b>									
<b>Hercules Ex</b>	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
<b>MB 3.0 Zeus</b>	✓	≈ 4 500	✓	✓	✓	✓	✓	✓	-
<b>MB 3.0 Zeus with Athena</b>	✓	≈ 4 500	✓	✓	✓	✓	✓	✓	-
<b>MB 3.0 Hermes</b>	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
<b>MB 3.0 Hermes with Athena</b>	-	≈ 4 500	✓	✓	✓	✓	✓	✓	✓
<b>MB 3.0 Selene</b>	✓	≈ 9 000	✓	-	✓	✓	-	✓	-
<b>MB 3.0 Selene with Athena</b>	✓	≈ 9 000	✓	-	✓	✓	-	✓	-
<b>MB 3.0 Atlas</b>	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
<b>MB 3.0 Atlas with Athena</b>	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
<b>MB 2.0 SERIES – FLASHLIGHT / HEADLIGHT</b>									
<b>UVG3 2.0 Spotlight</b>	-	≈ 80 000	✓	-	-	-	-	✓	-
<b>UVG3 2.0 Midlight</b>	-	≈ 9 000	✓	-	✓	✓	-	✓	✓
<b>UVG3 2.0 Floodlight</b>	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓
<b>UVG5 2.0 Spotlight</b>	optional	≈ 80 000	✓	-	-	-	-	✓	-
<b>UVG5 2.0 Midlight</b>	optional	≈ 9 000	✓	-	✓	✓	-	✓	✓
<b>UVG5 2.0 Floodlight</b>	-	≈ 4 000	✓	✓	✓	✓	✓	✓	✓

PLEASE NOTE: The above models are in compliance with the above ASTM and ISO standards as well as industry specifications as indicated on the table above irrespective of the power source (Battery or Mains).



# BB 2.0 SERIES

**PENETRANT RESISTANT** UV INSPECTION LIGHT




**PENETRANT RESISTANT • LARGEST BEAM AVAILABLE  
HOMOGENEOUS BEAM • IP68 WATERPROOF**

Option 1: BB 2.0 Artemis	Option 2: BB 2.0 Helios	Option 3: BB 2.0 Ikaros		
Battery P/N: LI079 Mains P/N: LI078 Irradiance: $\approx 22\ 000\ \mu\text{w}/\text{cm}^2$ Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$ : 10¼ inches / 26 cm Battery running time: 5 hours	Battery P/N: LI077 Mains P/N: LI076 Irradiance: $\approx 9\ 000\ \mu\text{w}/\text{cm}^2$ Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$ : 11 inches / 28 cm Battery running time: 6 hours	Battery P/N: LI075 Mains P/N: LI074 Irradiance: $\approx 4\ 000\ \mu\text{w}/\text{cm}^2$ Beam diameter $> 1000\ \mu\text{w}/\text{cm}^2$ : 10¾ inches / 27 cm Battery running time: 7 hours		
<div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center;">             COMPLIES WITH  <b>ASTM E3022-2015</b>              Standard           </div>	<div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center;">             COMPLIES WITH  <b>ASTM E3022-2015</b>              Standard           </div>	<div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center;">             COMPLIES WITH  <b>ASTM E3022-2015</b>              Standard           </div>	<div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center;">             COMPLIES WITH  <b>Rolls-Royce RRES90061</b>              Specification           </div>	<div style="border: 1px solid black; border-radius: 15px; padding: 5px; text-align: center;">             COMPLIES WITH  <b>Airbus AITM6-1001</b>              Testing Method           </div>
<p><i>BB 2.0 Artemis is the most powerful handheld UV LED light in the world!</i></p>				

**BB 2.0 SERIES ACCESSORIES**



*POSITION ON A FLEXIBLE ARM (P/N: A536)*

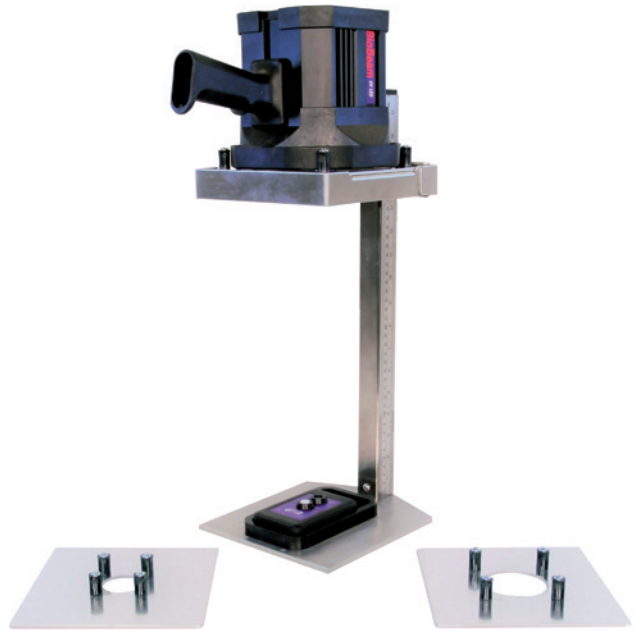

*DAILY CHECKS CAN BE DONE WITH OLYMPOS MEASUREMENT STAND (P/N: A542)*



*MOUNT ON A FRICTION ARM (P/N: A530)*



*MOUNT WITH MOUNTING YOKE (P/N: F800 & F801)*



*MOUNT ON A CABLE WINDER (P/N: F175)*



**MAKES IT BRIGHT**